



DRAGON DG-150S

The Sleek High Performance Bezel-Free POS Terminal

DRAGON DG-150S is a highly reliable POS Terminal with the performance of Intel® Skylake-U processors. Perfect for empowering your business with high performance and sophistication.



Power, Storage and LAN LED status indicate




15" Bezel-Free PCAP Touch



POS Terminal used as standalone 10.1" w/Touch and 15" 2nd display



10.1" 2nd display and VFD supported

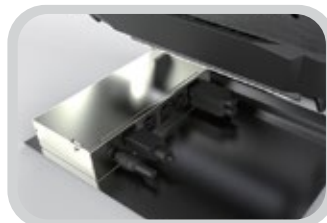

Support 12V / 24V PoweredUSB output



Kitchen Display System (KDS) application

Specifications (1/2)


Model Name	DG-150S	
Main Board	Main Board Name	X8H
	CPU	Intel® Skylake-U Processor: i3-6100U (2 cores, up to 2.3 GHz, TDP 15 Watt)
	Chipset	Intel® HD Graphics 520
	System Memory	SO-DIMM DDR4 x 1 2133MHz, 4 GB (Supports upto 32 GB)
	Thermal Solution	Fanless
	BIOS	AMI uEFI BIOS
	OS	Windows 8, Windows Embedded 8 Standard/Industry Retail WIN 10
	Display	LCD size
Brightness		400nits
Resolution		1024 x 768
Panel backlight type		LED
Touch Screen		P-cap
Storage Device	Interface	SATA x 3 (6.0Gb/s) Support RAID 0/1
	HDD / SSD	2.5" SATA HDD / SSD x 1 M.2 2242 SSD Slot x 2
I/O Ports	COM	COM 1 : RJ50 to DB9 RS232 x 1 (RI / 5V / 12V by BIOS selection) COM 2 : RJ50 to DB9 RS232 x 1 (RI / 5V / 12V by BIOS selection) COM 3 : RJ50 to DB9 RS232
	USB	USB 3.0 x 4 USB 2.0 x 2
	LAN	Gigabit Ethernet by RJ-45 x 1, support Wake on LAN
	Cash Drawer	RJ12 x 1, support 12V / 24V DC cash drawer
	Parallel & PS/2 Ports	Supported via Optional Conversion Cable
	Audio	2 Watt Speaker x 2 (Stereo)
	Video	Mini DisplayPort x 2
	DC-in	19VDC input, 2pins jack x 1
	Power Button	Power button x 1
	Internal Connector	COM
SATA		SATA connector (NB type) x 1
50pin pin-header		50 pin-header x 1 (EDP, COM6 (12V,VFD), USB2.0*3, Power Switch and LED)
Audio		Pin Header for Speaker x 1
Battery		CR2032
Cash Drawer Power		Pin header 12V/24V
Power Switch and LED		Pin Header
Others		Expansion Slot
	Communication	Wireless LAN module, M.2 2230 E-key (Optional)
	Wall mount	Option VESA mounting bracket
	Power Supply	External adapter, 19V DC input, 65Watt
	Colour	Black / White
	Material	Plastic / Aluminium / SECC
	EMC & Safety Compliance	CE / FCC / VCCI / CB / WEEE / RoHS
	Dimension (W x D x H)	36 x 18.9 x 29 cm (14.2 x 7.5 x 11.4 inch)
	Weight	5.3 kg



Specifications (2/2)

Model Name	DG-150S	
Environmental	Operating Temperature	0 to 40°C
	Storage Temperature	-20~ 60°C
	Humidity	20% to 85% RH (non condensing)

I/O Interface

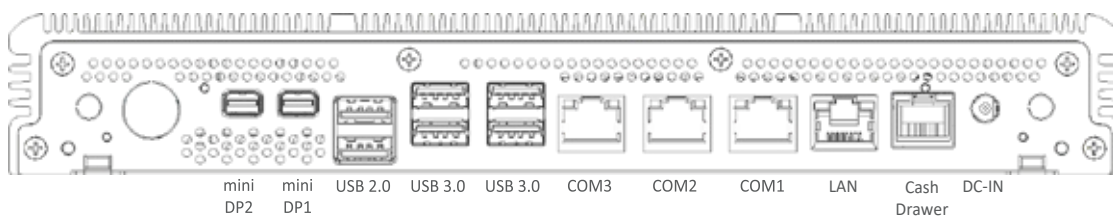

Ordering information

Main Unit

Part No.	Description
DG-150S , X8H-6100U	Skylake-U POS Terminal w/ 15" TFT LCD Intel® i3-6100U 2.3GHz, Black/white

Dimensions (cm / inch)

