

# TP-C4515 STAR

15" Industrial Fanless Slim POS Terminal

INNOVATING FOR INDIA




## Features

- Fanless Design with Intel® Celeron® J1900 CPU
- Aluminum Die Casting Backcover
- 15" True Flat Touch Screen
- HDD Easy Maintenance Design
- Optional MSR / i-Button / Fingerprint / VFD / 2nd Display
- Optional integrated Wireless LAN
- Wall-mountable VESA 100 x 100 Standard



## Specifications

System	CPU Support	Intel® Celeron® J1900
	Memory	DDR3L SO-DIMM, Standard 2GB (1 slot, up to 8GB)
Storage	Network	10/100/1000 Base-T Fast Ethernet
	Power Supply	60~90 Watt power adapter
I/O Ports	Audio	2W speaker
	System Weight	Easy stand with power adaptor approx. 6 kg
Peripheral (Optional)	Dimension	382 x 332 x 321 mm (with 45 degrees)
	O.S. Support	Win8 / POSReady7
Display	SATA	1 x 2.5" HDD (320 GB) or SSD
	USB	on rear 3 x USB 2.0, 1 x USB 3.0 on side bezel 1 x USB 2.0
Environment	Serial Ports	3 + 1 (optional) x RJ45 (all support +5V/12V selectable)
	LAN	1 x RJ45
Environment	VGA	1 x DB15
	Cash Drawer	1 + 1 (option, with Y cable) x RJ11 (+12V or +24V selectable)
Environment	DC-in	1 x 4pin DC Power Jack
	Customer Display	VFD, 20 columns and 2 lines, each column is 5 x 7 dots
	MSR & iButton	JIS-I or II, ISO Track1+2+3 (PS/2 interface)
Environment	2nd Display	8" or 10.4" LCD
	Fingerprint	8-bit grayscale, reader
Display	LCD	15" TFT LCD
	Resolution	1024 x 768
Display	Brightness	250 cd/m²
	Touch Screen	Non-Bezel-free : 5-wire Analog resistive
Environment	Tilt Angle	45~65 degrees with easy stand 0~68 degrees with normal stand
	EMC & Safety	CE / FCC
Environment	Operating Temp.	0 ~ 35° C
	Storage Temp.	-5 ~ 60° C
Environment	Humidity	20 ~ 90%



\* Please prefix city STD code before dialling

\*All information contained in this document is subject to change without prior notice.

# TP-C4515 STAR

15" Industrial Fanless Slim POS Terminal


INNOVATING FOR INDIA



## Highlights



## System I/O Ports

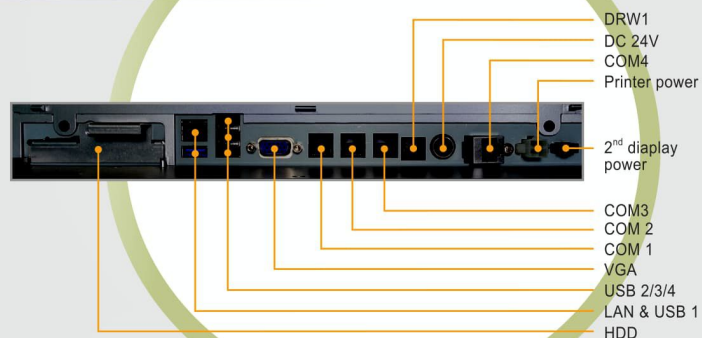

## Ordering Information



Order No	Description
PA-6322RA-A0B	Intel® Celeron® J1900 with Waterproof design and True Flat Resistive Touch,
PA-6322RZ-21A	DDR3 2GB memory /2.5" HDD
PA-6322RZ-41B	MSR, JIS-I or II, ISO Track1+2+3 (PS/2 interface)
PA-6322RZ-51B	Vacuum Fluorescent Display, 20 columns and 2 lines, each column is 5 x 7 dots
Color	Black
OS	Win8, POSReady7

## Applications

- Hospitality
- Foodservice




## Dimensions

Easy Stand  
( TP-C4515 STAR )



Adjustor angle:  
45~65


Normal Stand  
( TP-C4515 )



Adjustor angle:  
0~68

unit: mm

1 Year Warranty



\* Please prefix city STD code before diallin

## TVS Electronics Limited

South Phase, 7A, Second Floor, Industrial Estate,  
Guindy, Chennai - 600 032  
www.tvs-e.in | Email: sales-support@tvs-e.in